
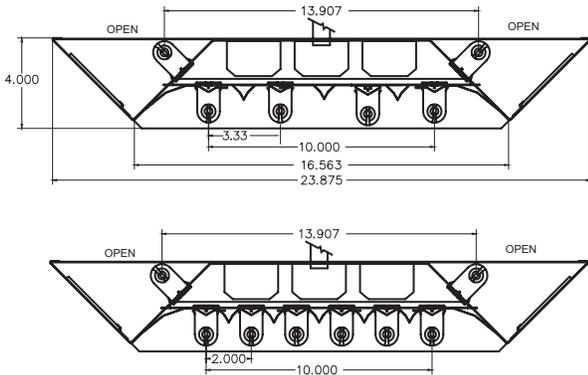


# SERIES 1020

Multi-Purpose Decorative  
High bay HID Replacement

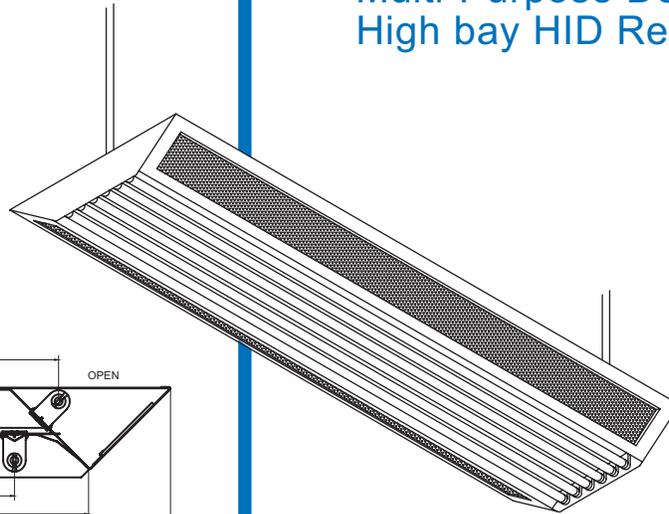

## FEATURES:

- POST PAINTED HIGH REFLECTANCE POWDER COAT FINISH ON HOUSING AS STANDARD - CUSTOM COLORS UPON REQUEST
- SURFACE OR PENDANT CEILING
- UTILIZES T8 TECHNOLOGY
- SPECULAR OR HIGH REFLECTANCE POWDER COAT REFLECTOR OPTIONS



UNION MADE IN THE USA.

## ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
2' X 4'	6-FO32	1020-*--648T8
2' X 4'	8-FO32	1020-*--848T8

LAMP COUNT INCLUDES TWO LAMPS FOR UPLIGHT

INSERT VOLTAGE AT END OF CATALOG NUMBER


## NOTES:

1. \* SPECIFY DIFFUSER TYPE ON ORDER - 12A PRISMATIC STANDARD
2. SPECIFY CUSTOM COLOR ON ORDER AT ADDITIONAL COST


MANUFACTURING  
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340  
(209) 723-9120 - FAX: (209) 723-9131

SALES OFFICE  
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718  
(510) 667-6950 - FAX: (510) 667-6959


## PENDANT AND DOTTIE HANGER MOUNTING INSTRUCTIONS



DUAL PENDANT



SINGLE PENDANT




DOTTIE HANGER

**!!! WARNING !!!**  
RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

**NOTE**  
All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

**NOTE**  
NEVER hang or mount fixture from wire access plate. Always use industry standard mounting systems.

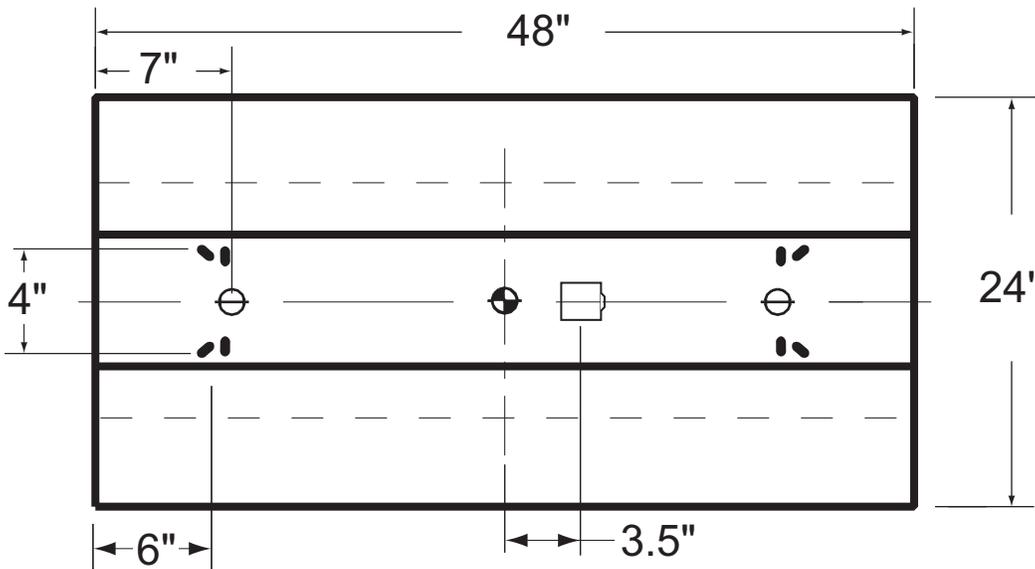

-  DOTTIE SLOT
-  7/8" K.O.
-  11/16" K.O.
-  WIRE ACCESS COVER PLATE

Back detail symbols

**DUAL PENDANT MOUNTING** - Remove two end 11/16" K.O.'s install pendants and secure using fasteners provided with pendant.

**SINGLE PENDANT MOUNTING** - Remove center 7/8" K.O.'s install pendants and secure using fasteners provided with pendant.

**DOTTIE HANGER MOUNTING** - Spread DOTTIE HANGER to approximately 5.5" insert hanger into diagonal slot with "hook" facing towards center. Repeat for other side. Connect DOTTIE HANGER to chain or other suspension system from top most bend.