


optional
regressed door



see accessories section
for options

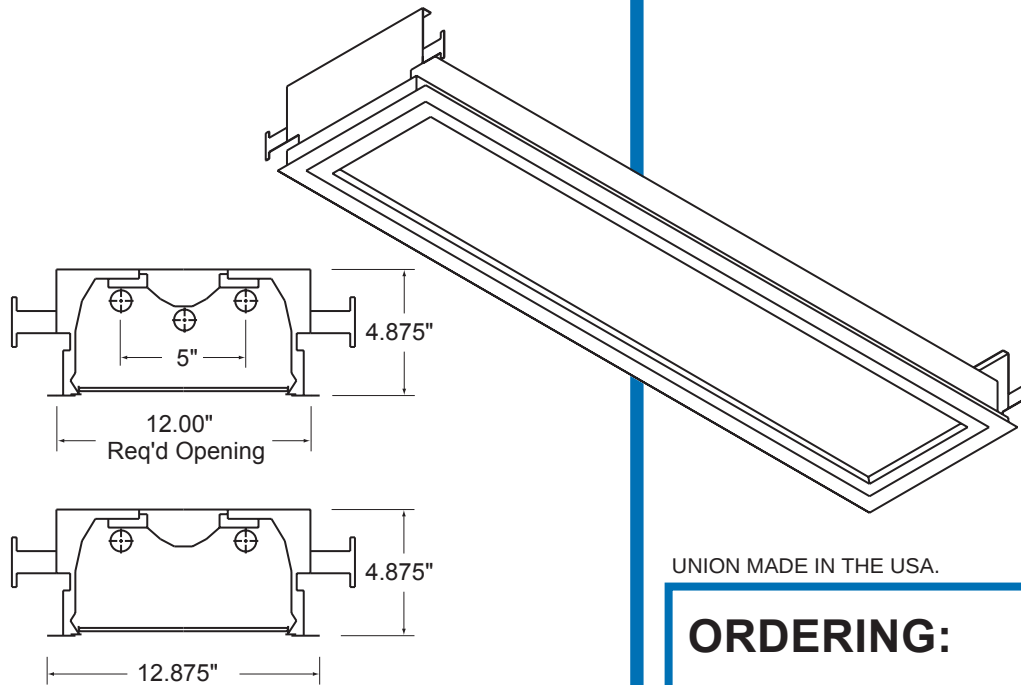

UNION MADE IN THE USA.

FEATURES:

- STURDY INTEGRAL FLANGES FOR EASE OF INSTALLATION
- SPRING LOADED LATCHES - STANDARD
- FULLY GASKETED REVERSIBLE T HINGED DOOR
- FLUSH OR REGRESSED DOOR-STEEL OR OPTIONAL ALUMINUM
- COMPATIBLE WITH MOST CONCEALED CEILINGS
- CHOICE OF LENSES, LOUVERS, OR DIFFUSERS
- POST PAINTED HIGH REFLECTANCE POWDER COAT FINISH
- LABOR SAVING WIRING ACCESS

ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
1'X 4'	2-FO32	312-*-12A-248T8
1'X 4'	3-FO32	312-*-12A-348T8
2-1'X 4'	4-FO32	312-*-12A-248-2T8 (TW)
2-1'X 4'	6-FO32	312-*-12A-348-2T8 (TW)

INSERT VOLTAGE AT END OF CATALOG NUMBER

NOTES:

1. OPTIONAL WING HANGER & PLASTER FRAMES AVAILABLE
2. SPECIFY ROW ARRANGEMENT WHEN ORDERING
3. 12A DENOTES AN ACRYLIC .110 PATTERN 12 LENS PROVIDED AS STANDARD UNLESS A SHIELDING OPTION IS SPECIFIED
4. MASTER/SLAVE AND OTHER WIRING OPTIONS AVAILABLE
5. REQUIRED OPENING 12" X 48.25"
6. IF ROW MOUNTED, REQUIRED OPENING IS 12" X ROW LENGTH PLUS 1/4"
7. SPECIFY SERIES 318 FOR ALUMINUM DOOR
8. * INSERT "R" FOR REGRESSED DOOR

MANUFACTURING
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340
(209) 723-9120 - FAX: (209) 723-9131


SALES OFFICE
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718
(510) 667-6950 - FAX: (510) 667-6959

BACK DETAIL

 WIRE ACCESS
COVER PLATE

 7/8" K.O.

Back detail symbols

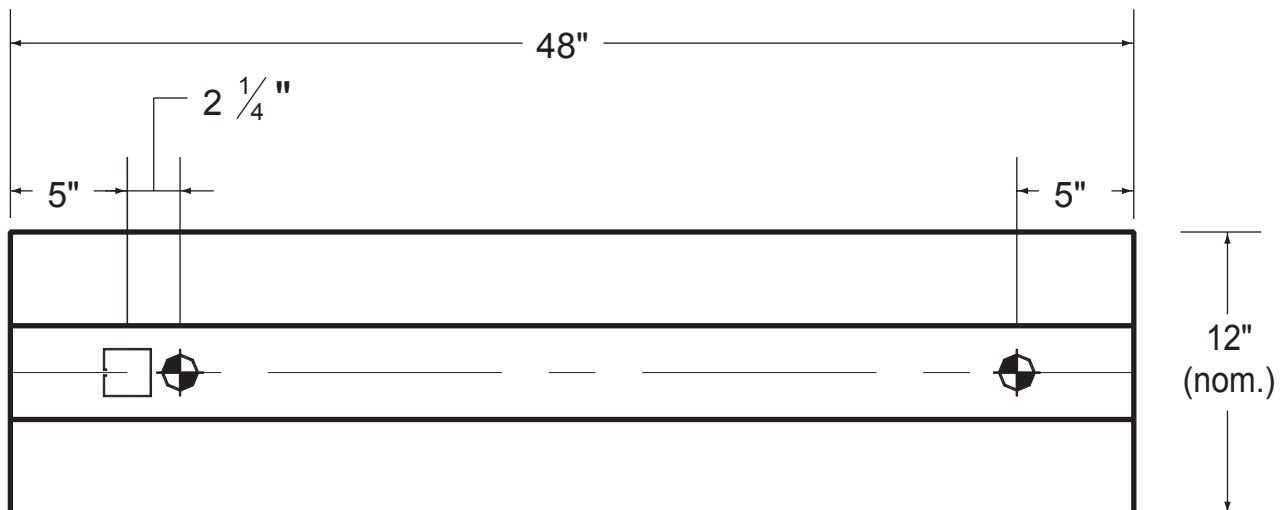

NOTE

All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

!!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

